

# Technical data sheet

## Clamp clip, single, A2 plastic pressure trough

Item number: 1178571



Suitable for all C profile rails with slot width 18 mm and 22 mm.

Polypropylene pressure trough, halogen-free, colour light grey RAL 7035.



- A2 Stainless steel
- 2B Bright, treated

| Master data                        |                         |
|------------------------------------|-------------------------|
| Item number                        | 1178571                 |
| Type                               | 2056U 52 A2             |
| Description 1                      | Clamp clip              |
| Manufacturer                       | OBO                     |
| Dimension                          | 46-52mm                 |
| Material                           | Stainless steel 1.4301  |
| Surface                            | Bright, treated         |
| Surface standard                   |                         |
| Smallest sales unit                | 25                      |
| Unit of quantity                   | Piece                   |
| Weight                             | 11.2 kg                 |
| Weight unit                        | kg/100 pc.              |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,5239 kg COe / 1 Piece |


# Technical data sheet

## Clamp clip, single, A2 plastic pressure trough

Item number: 1178571



### Dimensions

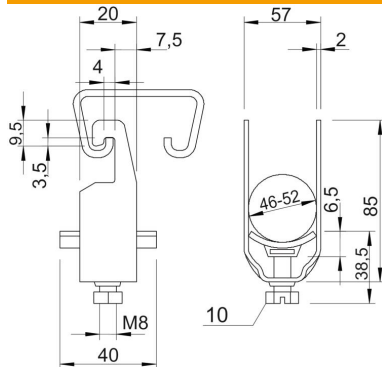

|                  |         |
|------------------|---------|
| Dimension A      | 20 mm   |
| Dimension B      | 57 mm   |
| Dimension C      | 40 mm   |
| Dimension G (mm) | M8      |
| Dimension H      | 85 mm   |
| Dimension L      | 38.5 mm |
| Dimension t      | 2 mm    |
| Dimension x      | 6.5 mm  |

### Technical data

|                                                |                 |
|------------------------------------------------|-----------------|
| Number of cables/pipes                         | 1               |
| for 1 cable H                                  | 85 mm           |
| for 1 cable L                                  | 38.5            |
| For pipe diameter, max.                        | 50 mm           |
| For pipe diameter, min.                        | 50 mm           |
| for rail with slot width (with interval), max. | 22 mm           |
| for rail with slot width (with interval), min. | 18 mm           |
| Halogen-free                                   | yes             |
| Max. Tightening torque                         | 5 Nm            |
| With plastic trough                            | yes             |
| With metal trough                              | no              |
| Mounting type                                  | Profile rail    |
| ROHS-conformant                                | yes             |
| Impact-resistant                               | no              |
| Clamping range D, max.                         | 52 mm           |
| Clamping range D, min.                         | 46 mm           |
| Surface addition                               | Untreated       |
| Material addition                              | Rustproof steel |
| With counter-trough                            | no              |
| Material of trough                             | Plastic         |
| Material quality of trough                     | Polypropylene   |