

Technical data sheet

ATR 5422 cable routing trunking

Item number: 6130958



ATRIANE mini trunking for covered, discreet cable routing in internal areas. Trunking base with base perforation for direct mounting on the wall. With patented surface with HDF sealing for considerably reduced sensitivity to scratches. Cover designed in the shape of a sloping roof. Base and cover engaged in set.



PVC Polyvinylchloride

Master data

Item number	6130958
Type	ATR 5422 blc
Description 1	Cable trunking
Description 2	ATRIANE Set 22x54 9010
Manufacturer	OBO
Dimension	2000x54x22
Colour	Pure white; RAL 9010
Material	Polyvinylchloride
Smallest sales unit	48
Unit of quantity	Metre
Weight	32.6 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	0,6155 kg COe / 1 Meter


Technical data sheet

ATR 5422 cable routing trunking

Item number: 6130958



Dimensions

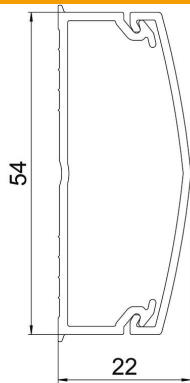

Length	2,000 mm
Width	56.4 mm
Height	22.2 mm

Technical data

Number of fixed partitions	0
Number of insertable partitions	0
Version, cable trunking cover	Loose
Fastening type	Base perforation
Maintain electrical functions	no
Halogen-free	no
Cable retaining clip	no
Duct connector	no
Delivery on a roll	no
Usable cross-section	825 mm ²
ROHS-conformant	yes
Protection rating	IP40
Protective film	no
Protection rating IK code	IK07.
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	5 °C
Transparent	no