

# Technical data sheet

## Clamp clip 2056 F-foot, 1-fold, metal pressure sleeve, A2

Item number: 1187532



Clamp clip with F-foot, metal pressure sleeve with rounded edges to protect the cable. For vertical and horizontal mounting of 1 single cable on flat bars. With 1-start screw thread on pressure sleeve, universal hexagonal screw head WAF10, with slot and cross recess. Suitable for assembly indoors and outdoors. We recommend the use of a counter-sleeve.



**A2** Stainless steel

**2B** Bright, treated

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 1187532                  |
| Type                               | BS-F1-M-40 A2            |
| Description 1                      | Clamp clip 2056          |
| Manufacturer                       | OBO                      |
| Dimension                          | 34-40mm                  |
| Material                           | Stainless steel 1.4301   |
| Surface                            | Bright, treated          |
| Surface standard                   |                          |
| Smallest sales unit                | 25                       |
| Unit of quantity                   | Piece                    |
| Weight                             | 8.5 kg                   |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,5253 kg CO2e / 1 Piece |


# Technical data sheet

Clamp clip 2056 F-foot, 1-fold, metal pressure sleeve, A2

Item number: 1187532



## Dimensions

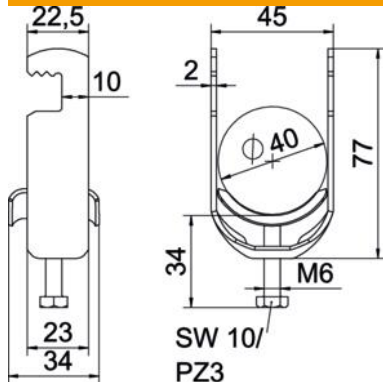

|                  |         |
|------------------|---------|
| Length           | 22.5 mm |
| Width            | 45 mm   |
| Height           | 77 mm   |
| Plate thickness  | 2 mm    |
| Dimension A      | 22.5 mm |
| Dimension B      | 45 mm   |
| Dimension C      | 33 mm   |
| Dimension G (mm) | M6      |
| Dimension H      | 77 mm   |
| Dimension L      | 34 mm   |
| Dimension t      | 2 mm    |

## Technical data

|                               |                              |
|-------------------------------|------------------------------|
| Number of cables/pipes        | 1                            |
| For pipe diameter, max.       | 40 mm                        |
| For pipe diameter, min.       | 34 mm                        |
| Thread                        | M6                           |
| Halogen-free                  | yes                          |
| Length of external dimensions | 33 mm                        |
| Max. Tightening torque        | 3 Nm                         |
| With metal trough             | yes                          |
| Mounting type                 | Flat profile                 |
| ROHS-conformant               | yes                          |
| Slot width                    | 10 mm                        |
| Clamping range D, max.        | 40 mm                        |
| Clamping range D, min.        | 34 mm                        |
| Surface addition              | Untreated                    |
| Material addition             | Rustproof steel              |
| With counter-trough           | no                           |
| Material of trough            | Rustproof steel              |
| Material quality of trough    | Stainless steel 304 (1.4301) |