

# Technical data sheet

## CL2510 profile rail, slot 11 mm, FS, unperforated

Item number: 1107127



Light-duty C profile rail for cable routing, in conjunction with series clips or clamp clips with N foot. Can also be used in building of control cabinets. Unperforated, non-breakable.



**St** Steel

**FS** Strip galvanised

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 1107127                  |
| Type                               | CL2510UP2000FS           |
| Description 1                      | Profile rail             |
| Description 2                      | unperforated, slot 11mm  |
| Manufacturer                       | OBO                      |
| Dimension                          | 2000x25x10               |
| Material                           | Steel                    |
| Surface                            | Strip galvanised         |
| Surface standard                   | DIN EN 10346             |
| Smallest sales unit                | 2                        |
| Unit of quantity                   | Metre                    |
| Weight                             | 36 kg                    |
| Weight unit                        | kg/100 m                 |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,9251 kg CO2e / 1 Meter |


# Technical data sheet

CL2510 profile rail, slot 11 mm, FS, unperforated

Item number: 1107127



## Dimensions

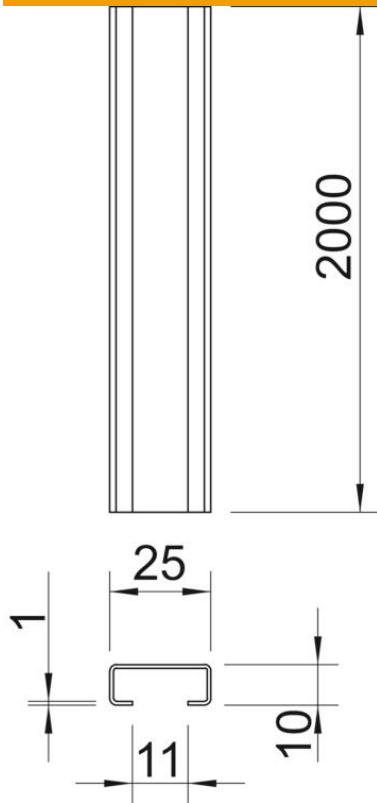

|             |          |
|-------------|----------|
| Length      | 2,000 mm |
| Width       | 25 mm    |
| Height      | 10 mm    |
| Dimension L | 2,000 mm |

## Technical data

|                               |                      |
|-------------------------------|----------------------|
| Breakable                     | no                   |
| Type of perforation           | Without              |
| Version for                   | Single profile       |
| Bundle                        | 50 m                 |
| Maintain electrical functions | no                   |
| Material thickness            | 1 mm                 |
| With perforation              | no                   |
| With toothing                 | no                   |
| Profile shape                 | C profile            |
| ROHS-conformant               | yes                  |
| Slot width                    | 11 mm                |
| Static value A                | 0.52 cm <sup>2</sup> |
| Static value Iy               | 0.08 cm <sup>4</sup> |
| Static value Iz               | 0.44 cm <sup>4</sup> |
| Static value Wy               | 0.13 cm <sup>3</sup> |
| Static value Wz               | 0.35 cm <sup>3</sup> |