

# Technical data sheet

## GES4 service outlet with locking slider

Item number: 7405146



Service outlet with locking slider for up to 6 individual Modul 45 devices in 2 UT3 universal supports, use in duct systems and system floors for indoor use.

Floor covering recess in the hinged cover pre-adjusted to 5 mm, if necessary adjustable to 3, 8 or 10 mm.  
Up to 4 installation devices can be used with 50 mm central plate.

Service outlet with locking slider, 2-compartment, for the installation of MT4 mounting support. Two type APMT2 cover plates can be installed.

Floor covering recess in the hinged cover pre-adjusted to 5 mm, if necessary adjustable to 3, 8 or 10 mm.



PA Polyamide

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 7405146                  |
| Type                               | GES4-2U10T 9011          |
| Description 1                      | Service outlet           |
| Description 2                      | for universal mounting   |
| Manufacturer                       | OBO                      |
| Dimension                          | 222x222x65               |
| Colour                             | Graphite black; RAL 9011 |
| Material                           | Polyamide                |
| Smallest sales unit                | 1                        |
| Unit of quantity                   | Piece                    |
| Weight                             | 124 kg                   |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 3,6377 kg CO2e / 1 Piece |


# Technical data sheet

## GES4 service outlet with locking slider

Item number: 7405146



### Dimensions

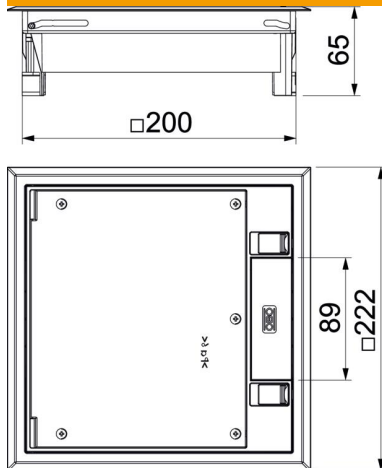

|        |        |
|--------|--------|
| Length | 222 mm |
| Width  | 222 mm |
| Height | 65 mm  |

### Technical data

|                                                   |                         |
|---------------------------------------------------|-------------------------|
| Number of installable devices                     | 6                       |
| Number of mounting boxes                          | 2                       |
| Cover version                                     | Square                  |
| Cable outlet version                              | Swivellable cord outlet |
| Cut-out dimensions                                | 201x201 mm              |
| Floor covering protection frame                   | yes                     |
| Floor care                                        | Dry                     |
| Seal installation option                          | no                      |
| Screed height, min.                               | 73 mm                   |
| Floor height, min.                                | 73 mm                   |
| Suitable for raised floor installation            | yes                     |
| Suitable for screed-flush closed underfloor ducts | no                      |
| Suitable for screed-covered underfloor ducts      | yes                     |
| Suitable for cavity floor installation            | yes                     |
| Suitable for wet care                             | no                      |
| Suitable for underfloor box                       | 250/350                 |
| Suitable for underfloor ducts                     | yes                     |
| Device support to accept mounting boxes           | yes                     |
| Length of installation dimensions                 | 201 mm                  |
| With floor covering recess                        | yes                     |
| Nominal size for device installation units        | 4                       |
| Frame version                                     | Carpet protection frame |
| ROHS-conformant                                   | Exempt                  |
| Protection rating (IP) when used                  | IP20                    |
| Protection rating (IP) when unused                | IP40                    |
| Protection rating IK code                         | IK08                    |
| Heavy-duty version                                | no                      |

# Technical data sheet

## GES4 service outlet with locking slider

Item number: 7405146



### Technical data

|                               |                |
|-------------------------------|----------------|
| Clamping range D, max.        | 75 mm          |
| Clamping range D, min.        | 8 mm           |
| Installation system type      | UT3            |
| Vertical load, large area     | to 3,000 N     |
| Vertical load, small area     | to 2,000 N     |
| Approvals                     | VDE            |
| Opening mechanism             | Locking slider |
| Floor covering thickness      | 5 mm           |
| Floor covering thickness max. | 10 mm          |