# Technical data sheet

## Service outlet with blanking cover and Allen slot, GES R2, old copper
## Item number: 7408874

Service outlet with blanking cover and Allen slot for GES R2 floor socket for direct installation in the MT R2 installation socket in indoor areas.

The cover version can be used as a cable outlet.

When closed, the floor socket can be wet-cleaned.

IP 66 IK 10

Zn Die-cast zinc

Cu Copper-plated

### Master data

| | |
|---|---|
| Item number | 7408874 |
| Type | GES R2B Cu |
| Description 1 | Floor socket |
| Description 2 | blind with Allen key recess |
| Manufacturer | OBO |
| Material | Die-cast zinc |
| Surface | Copper-plated |
| Surface standard | |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 58.32 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,2075 kg CO2e / 1 Piece |

# Technical data sheet

## Service outlet with blanking cover and Allen slot, GES R2, old copper
## Item number: 7408874

### Dimensions




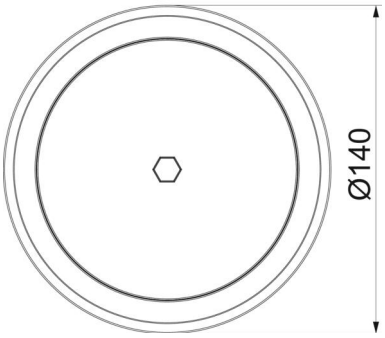


### Technical data

| | |
|---|---|
| Cover version | Round |
| Cable outlet version | No cable outlet |
| Floor covering protection frame | yes |
| Floor care | Wet |
| Suitable for raised floor installati-on | yes |
| Suitable for cavity floor installation | yes |
| Suitable for wet care | yes |
| Suitable for underfloor ducts | no |
| With floor covering recess | no |
| Standard | EN 50085-2-2 |
| ROHS-conformant | yes |
| Protection rating (IP) when unu-sed | IP66 |
| Protection rating IK code | IK10 |
| Vertical load, large area | to 15,000 N |
| Vertical load, small area | to 3,000 N |
| Approvals | VDE |
| Opening mechanism | Tool |