Technical data sheet

MS4141PP mounting rail, slot 22 mm, FT, perforated

Item number: 1122500

Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.

U 22 E30 E90

St Steel

FT Hot-dip galvanised

Master data

Item number	1122500
Type	MS4141PP0300FT
Description 1	Profile rail
Description 2	perforated, slot 22mm
Manufacturer	OBO
Dimension	300x41x41
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	1
Unit of quantity	Piece
Weight	67 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	1,6882 kg CO2e / 1 Piece

Technical data sheet

MS4141PP mounting rail, slot 22 mm, FT, perforated

Item number: 1122500

Dimensions

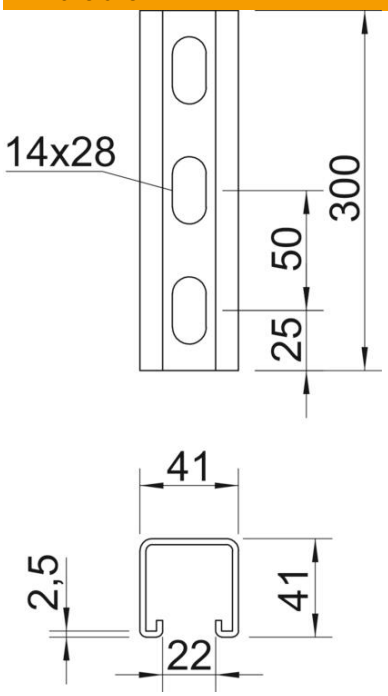

Length	300 mm
Width	41 mm
Height	41 mm
Dimension L	300 mm

Technical data

Breakable	no
Type of perforation	3 sides perforated
Version for	Single profile
Drill hole spacing, centre	50 mm
Maintain electrical functions	yes
Hole size	11x25
Material thickness	2.5 mm
With perforation	yes
With toothing	yes
Profile shape	C profile
ROHS-conformant	yes
Slot width	22 mm
Static value A	2.42 cm^2
Static value Iy	6 cm^4
Static value Iz	6.97 cm^4
Static value Wy	2.49 cm^3
Static value Wz	2.88 cm^3