Technical data sheet

Joint connector A4

Item number: 6016648

Screwed version of joint connector for mesh cable trays.
Including screw of type FRS M6 x 20.
Figure: Positioning and quantity of mesh cable tray connectors.

50–150 mm = 2 units

200–300 mm = 3 units

400–450 mm = 4 units

500–600 mm = 5 units

A4	Stainless steel
2B	Bright, treated

Master data

Item number	6016648
Type	GSV 34 A4
Description 1	Joint connector
Description 2	for mesh cable tray
Manufacturer	OBO
Colour	stainless steel
Material	Stainless steel 1.4401
Surface Surface standard	Bright, treated
Smallest sales unit	20
Unit of quantity	Piece
Weight	3 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,2345 kg CO2e / 1 Piece

Technical data sheet

Joint connector A4

Item number: 6016648

Dimensions

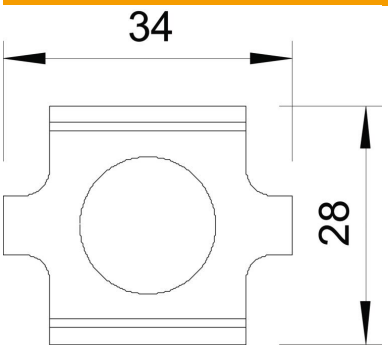

Dimension	28 x 34
Length	34 mm
Width	29 mm
Width	1.14 in
Height	24 mm
Height	0.94 in

Technical data

Version for	Straight connector
Maintain electrical functions	no
Suitable for mesh cable tray	yes
Suitable for cable ladder	no
Suitable for cable tray	no
Adjustable connector, horizontal	no
Articulated connector, vertical	no
Suitable for mesh cable tray wire, max.	4.9 mm
Suitable for mesh cable tray wire, min.	3.9 mm
ROHS-conformant	yes
Rustproof steel, pickled	yes
Connection type	Screw connector